



(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification :
22.03.95 Bulletin 95/12

(51) Int. Cl.⁶ : **H05B 41/29, H02H 7/122**

(21) Application number : **90201003.2**

(22) Date of filing : **23.04.90**

(54) **DC/AC converter for the supply of two gas and / or vapour discharge lamps.**

(30) Priority : **28.04.89 NL 8901074**

(43) Date of publication of application :
31.10.90 Bulletin 90/44

(45) Publication of the grant of the patent :
22.03.95 Bulletin 95/12

(84) Designated Contracting States :
AT BE DE FR GB NL

(56) References cited :
EP-A- 0 093 469
EP-A- 0 205 287
EP-A- 0 239 793
DE-A- 3 248 017

(73) Proprietor : **Philips Electronics N.V.**
Groenewoudseweg 1
NL-5621 BA Eindhoven (NL)

(72) Inventor : **De Bijl, Adrianus Martinus Johannes**
c/o INT. OCTROOIBUREAU B.V.,
Prof. Holstlaan 6
NL-5656 AA Eindhoven (NL)
Inventor : **Iding, Wilhelmus Hermanus**
c/o INT. OCTROOIBUREAU B.V.,
Prof. Holstlaan 6
NL-5656 AA Eindhoven (NL)
Inventor : **Overgoor, Bernardus Josephus**
c/o INT. OCTROOIBUREAU B.V.,
Prof. Holstlaan 6
NL-5656 AA Eindhoven (NL)

(74) Representative : **Evers, Johannes Hubertus**
Maria et al
INTERNATIONAAL OCTROOIBUREAU B.V.,
Prof. Holstlaan 6
NL-5656 AA Eindhoven (NL)

EP 0 395 159 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

The invention relates to a DC/AC converter for supplying two gas and/or vapour discharge lamps according to the preamble of present Claim 1. This converter comprises two input terminals which are to be connected to a DC-voltage source, these two input terminals being interconnected by a first series circuit i comprising a first switching element and a second switching element, a circuit comprising a capacitor and at least two output circuits being present, the circuit comprising the capacitor being connected on the one hand to one of the input terminals and on the other hand to a first end of each of the two output circuits, and a second end of the first output circuit being connected to a junction point between the first switching element and the second switching element, while each of the output circuits is provided with connection members between which a lamp to be supplied can be connected and a control device being present for rendering the said switching elements alternately conducting.

A known DC/AC converter of the kind indicated above has been described in, for example, EP-A-0093.469. This known converter is used for supplying two lamps which are connected in parallel branches.

A drawback of this known converter is that, if one of the two switching elements becomes defective, and thus remains non-conducting, both lamps will extinguish.

EP-A-0 205 287 discloses a DC-AC-converter for operating two discharge lamps. This DC-AC-converter also comprises two input terminals for connection to a DC-voltage source, two series circuits interconnecting the input terminals and each comprising a series arrangement of two switching elements. This DC-AC-converter further comprises a control circuit coupled to the four switching elements for rendering alternately conducting the switching elements of each of the two series circuits. This DC-AC-converter further comprises a series arrangement of two output circuits, respective ends of said series arrangement being connected to respective junction points of the series arrangements of switching elements comprised in the two series circuits. However, the DC-AC-converter disclosed in EP-A-0 205 287 does not comprise a capacitor coupled between a junction point of the two output circuits and one of the input terminals. Because of this lacking feature, in case one of the switching elements comprised in a DC-AC-converter as disclosed in EP-A-0 205 287 becomes defective, both discharge lamps operated on the DC-AC-converter extinguish.

The invention has for its object to provide a DC-AC converter of the kind described in the opening paragraph with which, if one of the switching elements remains non-conducting, one output circuit can still continue to function, so that a lamp connect-

ed to it can continue to emit light.

According to the invention, therefore, a DC/AC converter of the kind referred to in the opening paragraph is provided with the characterising features of the present Claim 1.

An advantage of a converter according to the invention is that, if one of the four switching elements becomes defective, and thus remains non-conductive in the operational state, one output circuit can still continue to function, so that a discharge lamp connected to it can continue to emit light.

In undisturbed operating conditions of the converter, in which two lamps are supplied, the alternating character of the voltage across these lamps is obtained by having the voltage across a series circuit comprising the two output circuits change its sign continuously.

This can be explained as follows. Suppose the first and the third switching element are connected to the positive input terminal of the converter, and that the second and the fourth switching element are connected to its negative input terminal. The first and fourth switching elements will then, for example, be made conducting and non-conducting practically simultaneously by the control device. Similarly, the second and third switching elements will be made non-conducting and conducting practically simultaneously by the control device. The fact that the combination of the first and fourth switching elements on the one hand and the combination of the second and third switching elements on the other hand are made conducting at alternate moments results in the AC-voltage across the series circuit comprising the two output circuits.

It is also conceivable that, while the first switching element is in the conducting state, the associated fourth switching element is made conducting and non-conducting alternately. This also holds for a few other combinations of switching elements from the first and the second series circuit of the converter.

If only one of the output circuits is provided with a correctly functioning lamp, a remaining part of the converter can function as a half-bridge circuit and thus supply the lamp.

The invention is based on the recognition of the fact that two DC/AC converters designed as half-bridge circuits can be so joined together that they have their capacitors in common.

It is conceivable for the converter according to the invention to have a second capacitor, the two capacitors forming a capacitive voltage divider which interconnects the input terminals of the converter. A junction point between these capacitors is then at the same time the first end of each of the two output circuits.

Thanks to this capacitive voltage divider, the voltages across the output circuits can remain substantially equal. This means that the lamps are operated

in a uniform way.

The discharge lamps to be supplied may be high-pressure discharge lamps or low-pressure discharge lamps.

The lamps may or may not be provided with pre-heatable electrodes.

A stabilizer ballast for such a lamp may, for example, be included in one of the supply conductors of the bridge circuit of the converter. Alternatively, a stabilizer ballast, for example a choke coil, may form part of one of the output circuits.

Furthermore, an output circuit may be provided with a further reactive circuit element, for example a further capacitor, across which the lamp to be supplied can be connected. This reactive circuit element may serve to promote the ignition of the lamp in question.

If one of the two lamps becomes defective, and thus non-conducting, so that it extinguishes, it is possible that all four switching elements of the converter continue to be controlled by the control device. The control of only two of these switching elements, however, is necessary then, i.e. of that pair of switching elements of which a junction point is connected to the second end of that output circuit to which the still operating lamp is connected. So these are the two switching elements forming part of the half-bridge circuit referred to above in the single-lamp situation.

A DC/AC converter according to the invention may be provided with a control device equipped with a light-sensitive coupling member (optocoupler), the light-sensitive part of which is aimed at one of the lamps to be supplied in operating conditions. The said coupling member is then included in the circuit in such a way that, when it is no longer illuminated - which means that the relevant lamp has extinguished - the control of that pair of switching elements of the converter which is no longer needed is blocked.

Such a blocking of the control action of the switching elements no longer needed is especially useful if, without blocking, the currents in the useless section of the converter circuit would rise to unacceptable levels. The blocking mechanism then acts as a protection at the same time.

In a preferred embodiment of a DC/AC converter according to the invention, the second output circuit contains, as does the first output circuit, a coil and a further capacitor, during operation of each of the output circuits the associated lamp being in series with its coil and shunted by its further capacitor, while a junction point between the coil belonging to an output circuit and the further capacitor is connected to an auxiliary blocking device which, when activated, blocks the control of that pair of switching elements of the converter whose junction point is connected to the second end of the associated output circuit.

An advantage of the preferred embodiment is that on the one hand the ignition of the lamps can be pro-

moted by means of the further capacitor, while on the other hand there is a considerable degree of freedom in the spatial distribution of protecting components of the converter circuit.

This preferred embodiment makes use of the fact that inadvertent extinguishing of a lamp leads to a change in the potential of the junction point between the coil and the further capacitor of the associated output circuit.

The auxiliary blocking device may be equipped with a timer circuit for delaying the blocking moment. Thus the lamp is given sufficient time to ignite in case there is no defect.

It should be noted that a protection circuit for a DC/AC converter provided with two lamps is known *per se* from GB 2 131 236, Fig. 6. The operation of the protection circuit proposed therein, however, has the disadvantage that the correctly functioning lamp is also extinguished.

In a further preferred embodiment of a DC/AC converter according to the invention, the connection between the control device and those two switching elements which belong to the same series circuit of the converter is provided with a further switch.

An advantage of this preferred embodiment is that the converter can be used for supplying either one lamp or two lamps, as desired. Since the further switch forms practically part of a control circuit, it need be designed for low current values only.

The invention will be further explained with reference to a drawing, in which Fig. 1 shows a DC/AC converter according to the invention, to which two discharge lamps are connected. It also shows a rectifier bridge to which the input terminals of the converter are connected. Fig. 2 of the drawing shows an embodiment of a blocking circuit as can be used in the converter shown in Fig. 1.

In Fig. 1, the reference numerals 1 and 2 indicate terminals to be connected to an AC-voltage source of approximately 220 volts, 50 Hz. The terminal 1 is connected to an input of a rectifier bridge 3, which comprises four diodes. The terminal 2 is connected to another input of the bridge 3. An output terminal of the rectifier bridge 3 is connected to an input terminal 4 of a DC/AC converter. Another output terminal of the rectifier bridge 3 is connected to an input terminal 5 of the converter. A capacitor 70 connects terminal 4 to the terminal 5.

In addition, the DC/AC converter comprises three circuits, each of which interconnects the input terminals 4 and 5. First of all there is a first series circuit comprising a first switching element 6 and a second switching element 7. These are semiconductor switching elements of the Power MOS-FET type. Then there is a capacitive voltage divider comprising two capacitors 8 and 9, and finally a second series circuit comprising a third switching element 10 and a fourth switching element 11. The latter two switching

elements are of the same type as the switching elements 6 and 7.

The converter has two output circuits. Discharge lamps 12 and 13, respectively, are connected to these output circuits during operation.

The first output circuit consists of a series circuit comprising a coil 14 and three capacitors 15, 16 and 17. The lamp 12, which is provided with preheatable electrodes 12a and 12b, is shunted by the capacitor 16. The capacitor 15 is in parallel with the electrode 12a, while the capacitor 17 is in parallel with the electrode 12b. A first end of this first output circuit is connected to a junction point 18 between the capacitors 8 and 9. A second end of this output circuit is connected to a junction point 19 between the switching elements 6 and 7.

The second output circuit, comprising components 20 up to and including 23, is practically identical to the first output circuit. The reference numeral 20 indicates a coil, and the numbers 21, 22 and 23 each indicate a capacitor. These capacitors are connected to the lamp 13, which is provided with preheatable electrodes 13a and 13b, in the same way as the capacitors 15 up to and including 17 are connected to the first lamp 12. On either side of both the capacitor 16 and the capacitor 22 there are connection members for the lamps 12 and 13, respectively.

A first end of the second output circuit is connected to the junction point 18 between the capacitors 8 and 9, while a second end of that output circuit is connected to a junction point 19a between the third and fourth switching elements 10 and 11, respectively. So the capacitor 8 connects terminal 4 with the first ends of both output circuits.

Up to the present point the description referred to the main circuit. The control circuit will now be described below.

The connection terminals 1 and 2 are further interconnected by a primary winding 24 of a transformer 25. A secondary winding 26 of the said 50 Hz transformer 25 is connected to a high-frequency oscillator 27, which acts as a control device.

Two parallel primary transformer windings 28 and 29 are connected to an output of the oscillator 27. Winding 28 is coupled to two secondary windings 30 and 31. Winding 30 connects a gate electrode of the switching element 6 to a main electrode of that switching element. The ends of the winding 30, furthermore, are interconnected by a series circuit of two oppositely arranged zener diodes 32 and 33.

A gate electrode and a main electrode of a switching element 7 are also connected to the winding 31. The direction of the winding 31, however, is opposite to that of the winding 30. The winding 31 is shunted again by a series circuit comprising two oppositely arranged zener diodes 34 and 35.

In a similar way as indicated for the switching elements 6 and 7, the switching elements 10 and 11 are

also provided with a signal from the control circuit via the winding 29. The direction of a winding 36, which provides the control of the switching element 11, corresponds to that of the winding 30. The direction of a winding 37, which provides the control of the switching element 10, corresponds to that of the winding 31.

The connection of the control device 27 to the winding 28, furthermore, includes a switch 38 and a logic AND-gate 51. In a similar way, a switch 39 and a logic AND-gate 52 are included in the connection between 27 and 29. An input of 51 and an input of 52 are connected to an output of blocking circuit SCI and an output of blocking circuit SCII, respectively. An input of blocking circuit SCI is connected to a junction between by the circuit elements 14 and 15; an input of blocking circuit SCII is connected to a junction point between the circuit elements 20 and 21. The blocking circuit will be described in more detail with reference to Fig. 2. The blocking circuit is an auxiliary blocking device which is provided with a timer circuit. The input 40 is connected to a series circuit comprising a diode 41, a zener diode 42 and a capacitor 43. The capacitor 43 is connected to terminal 5 at one end and is shunted by a series circuit of two resistors 44 and 45. A capacitor 46 is connected in parallel with the resistor 44. The resistor 44 and the capacitor 46 are connected at one end to terminal 5. Another end of capacitor 46 is connected to a gate electrode of a semiconductor switching element 48 via a breakdown element 47. A main electrode of this semiconductor switching element is connected to the terminal 5, while another main electrode is connected to the terminal 4 via a resistor 49. A junction point 60 between the elements 48 and 49 constitutes the output of the blocking circuit.

A protection circuit for the switching elements 10 and 11 of a similar nature is also present.

The operation of the circuit described is as follows.

First the case is considered that two lamps 12 and 13 are supplied simultaneously. For this purpose, the switches 38 and 39 are in the conducting state.

In that case the control device 27 alternately renders conducting first the first switching element 6 in conjunction with the fourth switching element 11, and then the second switching element 7 in conjunction with the third switching element 10. When the first pair of switching elements 6, 11 is conducting, the other pair of switching elements 7, 10 is non-conducting, and *vice versa*. As a result, an AC-voltage is applied to the series circuit comprising the two output circuits 14, 15, 16, 17 and 23, 22, 21, 20, which are provided with the lamps 12, 13. After the lamp electrodes 12a, 12b, 13a, 13b have been preheated through the capacitors 16 and 22, respectively, the two lamps 12 and 13 ignite. Should a lamp, for example lamp 12, refuse to ignite, the ensuing potential at the junction point between the coil 14 and the capacitor 15 will charge the capacitor 46 up to a potential

at which the breakdown element 47 becomes conducting. This renders the semiconductor switching element 48 conducting as well, so that the potential of the junction point 60, which was identical to the potential of terminal 4 before 48 became conducting, now becomes substantially equal to the potential of terminal 5. Since one of the inputs of the logic AND-gate 51 is now "low", the same is now true for its output, and consequently there is no high-frequency voltage available anymore across the ends of the winding 28. This terminates the control of the switching elements 6 and 7.

The lamp 13 continues to burn in this case, using the half-bridge circuit 8, 9, 10, 11; 20, 21, 22, 23.

The function of the capacitors 15, 17, 21 and 23 is to safeguard that the blocking circuit 1 or 2 functions correctly also in case of, for example, a fracture in one of the lamp electrodes.

It is conceivable for the control device 27 to be equipped with such an auxiliary device that a lamp starts at a different frequency from that which prevails in the operating state of that lamp.

If both lamps are correctly functioning (ones), it is possible to use only one of them, if so desired. To this end, switch 38 or switch 39 is turned to the OFF position.

In case of a defect in a switching element, for example in switching element 10, or in its control device, resulting in that this switching element no longer becomes conducting, both lamps will not extinguish; lamp 12 will still continue to emit light.

Unacceptable high voltages in the control circuits are prevented by the zener diodes, such as those indicated with the reference numeral 32, etc. . Unacceptable high currents in the main circuit, which would be caused by an inoperative lamp or an extinguishing lamp are eliminated via the auxiliary blocking devices SCI and SCII.

In a practical embodiment the output frequency of the oscillator 27 was approximately 30 kHz. The capacitors 8 and 9 each had a capacitance of approximately 0,5 μ F. The capacitors 16 and 22 each had a capacitance of approximately 10 nF, while the capacitors 15, 17, 23 and 21 each had a capacitance of approximately 220 nF. The coils 14 and 20 each had a value of approximately 24 mH. The lamps 12 and 13 were low-pressure mercury vapour discharge lamps of approximately 32 watts each. The oscillator 27 was an integrated circuit: SG 3524.

The DC/AC converter according to the invention, as described herein, in undisturbed operating conditions, can be used both for supplying one lamp and for simultaneously supplying two lamps. In the latter case these lamps can be so distributed in space that their fields oppose one another, so that any radio interference caused by them can be negligibly small.

Claims

1. A DC/AC converter for supplying two gas and/or vapour discharge lamps (12,13), comprising
 - two input terminals (4,5) for connection to a DC-voltage source,
 - a first series circuit interconnecting the input terminals (4,5) and comprising a series arrangement of a first switching element (6) and a second switching element (7),
 - a control device (27) coupled to the first switching element and to the second switching element for rendering the switching elements alternately conducting,
 - a load chain comprising a series arrangement of a capacitor (8) and a first output circuit (14,15,16,17,12a,12b) provided with connection members (12a,12b) for connecting a discharge lamp (12), said load chain shunting the first switching element or the second switching element in such a way that one end of the first output circuit is connected to a junction point (19) between the first switching element and the second switching element,
 - a second output circuit (20,21,22,23,13a,13b) comprising connection members (13a,13b) for connecting a second discharge lamp (13), a first end of said second output circuit being connected to a junction point (18) between the capacitor (8) and the first output circuit, characterized in that the DC/AC converter further comprises
 - a second series circuit interconnecting the input terminals (4,5) comprising a series arrangement of a third switching element (10) and a fourth switching element (11), both coupled to the control device (27) for being rendered alternately conducting, the second end of the second output circuit being connected to a junction point (19a) between the third switching element and the fourth switching element.
2. A DC/AC-converter according to Claim 1, characterized in that the first output circuit and the second output circuit both contain a respective coil (14,20) and a respective further capacitor (16,22), in the operational state of each of the output circuits the associated discharge lamp being connected in series with its coil and shunted by its further capacitor, a respective junction point between the coil and the further capacitor of each of the two output circuits being connected to a respective blocking device (SCI,SCII) which, when activated, blocks the control of that pair of switching elements whose junction point is con-

nected to the respective end of the output circuit.

3. A DC/AC-converter according to Claim 1 or 2, characterized in that the connection between the control device (27) and the series arrangement of the first switching element (6) and the second switching (7) element and the connection between the control device (27) and the series arrangement of the third switching element (10) and the fourth switching element (11) are each provided with a respective further switching element (38,39).

Patentansprüche

1. Wechselrichter zum Speisen von zwei Gas- und/oder Dampfentladungslampen (12, 13) mit folgenden Elementen:
- zwei Eingangsklemmen (4, 5) zum Anschließen an eine Gleichspannungsquelle,
 - eine erste Reihenschaltung zum Verbinden der Eingangsklemmen (4, 5) und mit einer Serienanordnung aus einem ersten Schaltelement (6) und einem zweiten Schaltelement (7),
 - einer Steuereinrichtung (27), die mit dem ersten Schaltelement und mit dem zweiten Schaltelement zum abwechselnden Leitendmachen und Sperren der Schaltelemente gekoppelt ist,
 - einer Belastungskette mit einer Serienanordnung aus einem Kondensator (8) und einem ersten Ausgangskreis (14, 15, 16, 17, 12a, 12b) mit Verbindungselementen (12a, 12b) zum Verbinden einer Entladungslampe (12), wobei die Belastungskette das erste Schaltelement oder das zweite Schaltelement auf derartige Weise nebenschließt, daß ein Ende des ersten Ausgangskreises mit einem Knotenpunkt (19) zwischen dem ersten Schaltelement und dem zweiten Schaltelement verbunden ist,
 - einem zweiten Ausgangskreis (20, 21, 22, 23, 13a, 13b) mit Verbindungselementen (13a, 13b) zum Verbinden einer zweiten Entladungslampe (13), wobei ein erstes Ende des zweiten Ausgangskreises mit einem Knotenpunkt (18) zwischen dem Kondensator (8) und dem ersten Ausgangskreis verbunden ist, dadurch gekennzeichnet, daß der Wechselrichter außerdem folgende Elemente enthält
 - einer zweiten Reihenschaltung zum Verbinden der Eingangsklemmen (4, 5) und mit einer Serienanordnung aus einem dritten Schaltelement (10) und einem vierten

Schaltelement (11), die beide mit der Steuereinrichtung (27) gekoppelt sind, um abwechselnd leitend und gesperrt gemacht zu werden, wobei das zweite Ende des zweiten Ausgangskreises mit einem Verbindungspunkt (19a) zwischen dem dritten Schaltelement und dem vierten Schaltelement verbunden ist.

2. Wechselrichter nach Anspruch 1, dadurch gekennzeichnet, daß der erste Ausgangskreis und der zweite Ausgangskreis beide eine jeweilige Spule (14, 20) und einen jeweiligen weiteren Kondensator (16, 22) enthalten, wobei im Betriebszustand jedes der Ausgangskreise die zugeordnete Entladungslampe in Reihe mit ihrer Spule geschaltet und durch ihren weiteren Kondensator nebengeschlossen ist, ein jeweiliger Knotenpunkt zwischen der Spule und dem weiteren Kondensator jedes der beiden Ausgangskreise mit einer jeweiligen Sperreinrichtung (SCI, SCII) verbunden ist, die bei Aktivierung die Steuerung jenes Schaltelementpaares sperrt, dessen Knotenpunkt mit dem jeweiligen Ende des Ausgangskreises verbunden ist.
3. Wechselrichter nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die Verbindung zwischen der Steuereinrichtung (27) und der Serienanordnung des ersten Schaltelements (6) und des zweiten Wechselrichters (7) und die Verbindung zwischen der Steuereinrichtung (27) und der Serienanordnung des dritten Schaltelements (10) und des vierten Schaltelements (11) mit einem jeweiligen weiteren Wechselrichter (38 39) versehen sind.

Revendications

1. Convertisseur courant continu/courant alternatif conçu pour alimenter deux lampes à décharge dans la vapeur et/ou le gaz (12, 13) comportant:
- deux bornes d'entrée (4, 5) pour être reliées à une source de tension continue,
 - un premier circuit en série interconnectant les bornes d'entrée (4, 5) et comportant un premier circuit en série constitué d'un premier élément commutateur (6) et d'un deuxième élément commutateur (7),
 - un dispositif de commande (27) couplé au premier élément commutateur et au deuxième élément commutateur pour rendre les éléments commutateurs alternativement conducteurs,
 - une chaîne de charge comportant un circuit en série constitué d'un condensateur (8) et d'un premier circuit de sortie (14, 15, 16, 17,

- 12a, 12b) présentant des éléments de connexion (12a, 12b) conçus pour la connexion d'une lampe à décharge (12), ladite chaîne de charge pontant le premier élément commutateur ou le deuxième élément commutateur de telle façon que l'une extrémité du premier circuit de sortie soit reliée à un point de jonction (19) situé entre le premier élément commutateur et le deuxième élément commutateur, 5
- un deuxième circuit de sortie (20, 21, 22, 23, 13a, 13b) comportant des éléments de connexion (13a, 13b) conçus pour la connexion d'une lampe à décharge (13), une première extrémité dudit deuxième circuit de sortie étant reliée à un point de jonction (18) situé entre le condensateur (8) et le premier circuit de sortie, 10
 - caractérisé en ce que le convertisseur courant continu/courant alternatif comporte encore: 15
 - un deuxième circuit en série interconnectant les bornes d'entrée (4, 5) et comportant un circuit en série constitué d'un troisième élément commutateur (10) et d'un quatrième élément commutateur (11), lesdits deux éléments commutateurs étant couplés à un dispositif de commande (27) pour être rendus alternativement conducteurs, la deuxième extrémité du deuxième circuit de sortie étant reliée à un point de jonction (19a) situé entre le troisième élément commutateur et le quatrième élément commutateur. 20
2. Convertisseur courant continu/courant alternatif selon la revendication 1, caractérisé en ce que le premier circuit de sortie et le deuxième circuit de sortie contiennent chacune une propre bobine (14, 20) et un autre propre condensateur (16, 22), dans l'état de fonctionnement de chacun des circuits de sortie la lampe à décharge associée étant connectée en série avec sa bobine et pontée par son autre condensateur, un propre point de jonction situé entre la bobine et l'autre condensateur de chacun des deux circuits de sortie étant relié à un propre dispositif de blocage (SCI, SCII), qui lorsqu'il est activé bloque la commande de cette paire d'éléments commutateurs dont le point de jonction est relié à la propre extrémité du circuit de sortie. 25
3. Convertisseur courant continu/courant alternatif selon la revendication 1 ou 2, caractérisé en ce que la connexion prévue entre le dispositif de commande (27) et le circuit en série constitué du premier élément commutateur (6) et du deuxième élément commutateur (7), et la connexion prévue 30
- entre le dispositif de commande (27) et le circuit en série constitué du troisième élément commutateur (10) et du quatrième élément commutateur (11) sont chacune équipées d'un autre propre élément commutateur (38, 39). 35
- 40
- 45
- 50
- 55

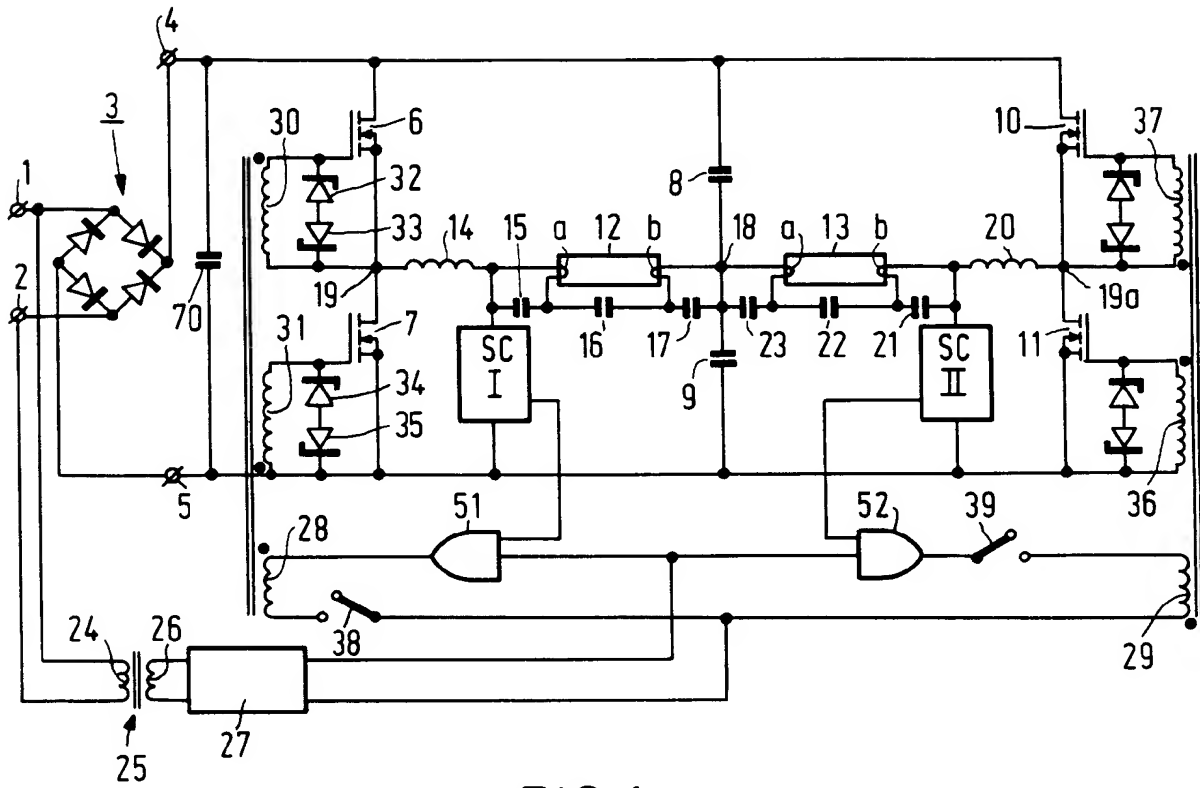


FIG. 1

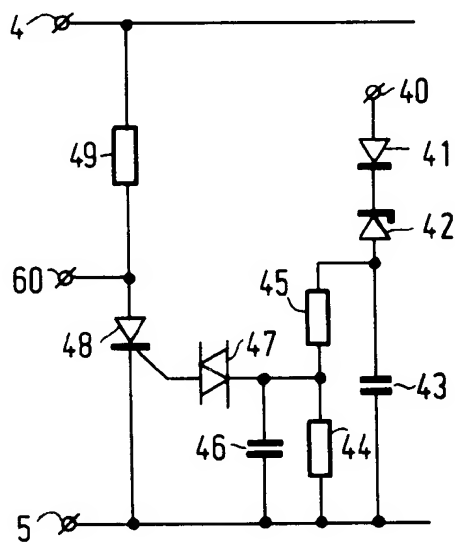


FIG. 2